#### INTRODUCTION

Metravi HT-12 is a digital temperature & humidity meter, with alarm clock, min & max temperature & humidity reading, comfort level indication and option to measure indoor temperature and humidity as well as outdoor temperature simultaneously.



#### **FUNCTIONS**

- Indoor Temperature/Humidity testing, along with outdoor temperature testing simultaneously
- Records MIN/MAX values of Temperature/Humidity
- °C/°F unit selectable
- Clock: 12/24 hour format selectable
- Alarm clock : Alarm time up to 60 seconds
- Comfort level indication

## **TECHNICAL SPECIFICATIONS**

Function	Range	Resolution	Accuracy	Sampling Frequency	Remark
Temperature	-10 ~ 50°C	1°C	± 1°C	10s	0 ~40°C : ± 1°C, others : ±2°C
Humidity	20 ~ 95%RH	1%RH	± 5%RH	10s	Normal temperature (40~80%RH: ±5%RH; others: ±8%RH)

Battery: 1.5V (AAA)


Storage temperature :  $-20^{\circ} \sim 60^{\circ}$ C) Storage humidity :  $20 \sim 80\%$ RH

# THE QUALITY LEADER

www.metravi.com

### **INTRODUCTION**

Metravi HT 13 is a digital temperature humidity meter with date and clock display. It is handy, easy-to-use, reliable and low power consumption. This meter is applicable in various occasions, such as homes, labs, offices, hotels, schools, shopping malls, hospitals, airports and restaurants.

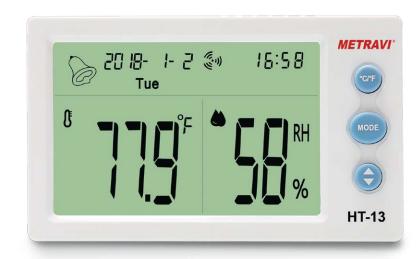

### **FUNCTION**

- Temperature/humidity
- °C/°F unit selectable
- Time clock : YYYY-MM-DD-Week-Time (12/24 selectable)
- On time alarm
- Alarm clock

#### **TECHNICAL SPECIFICATIONS**

Function	Range	Resolution	Accuracy	Sampling Frequency	Remark
Temperature	-10 ~ 50°C	1°C	± 1°C	10s	0 ~40°C : ± 1°C, others : ±2°C
	14 ~122 °F	0.2°F	± 2°F		32 ~104°F : ±2 °F, Other : ±4°F
Humidity	20 ~ 95%RH	1%RH	± 5%RH	10s	Ambient environment : (40~80%RH : ±5%RH; others : ±8%RH)

Battery: 1.5V (AAA)

Storage temperature :  $-20^{\circ} \sim 60^{\circ}$ C) ( $-4^{\circ} \sim 140^{\circ}$ F)

Storage humidity: 20 ~ 80%RH

# THE QUALITY LEADER

www.metravi.com